



**POLYKEN® 338**  
Foil Skrim Kraft Tape


**APPLICATIONS**

- Seal and patch FSK duct boards and insulation.
- Extra-strength seal to maintain vapor barrier integrity.

**FEATURES & BENEFITS**

- Aluminum foil FSK backing with a specially formulated adhesive inter-leafed with a release liner.
- Specially designed to meet high strength, tear resistant sealing tape requirements.
- Provides excellent adhesion to substrate over a wide temperature range.
- Diamond pattern matches most FSK boards and blankets.
- Tested in accordance with UL 723.

**CONSTRUCTION**

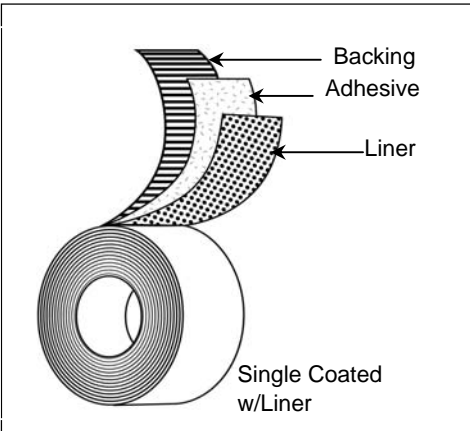

**PRODUCT DESCRIPTION**

**Single-Coated w/Liner Construction**

**Backing:**

- Foil, Tri-Directional Fiberglass, & Kraft Paper

**Adhesive:**

- Rubber

**Liner:**

- Paper

**Colors:**

- Aluminum

**TEST DATA**

Test	Typical Value	Typical Value (Metric)	Test Method
Total Thickness	8 mils	203.20 μ	ASTM D-1000
Adhesion to Steel	70 oz./in.	7.66 N/cm	PSTC-1
Adhesion to Backing	40 oz./in.	4.38 N/cm	PSTC-1
Tensile Strength	35 lb./in.	61.29 N/cm	ASTM D-1000
Smoke Development	5		
Flame Spread	10		
Maximum Performance Temperature	200 D F		

\*\*Recommended storage conditions: 40-60% Humidity, 60°F-80°F

The information presented herein was prepared at COVALENCE ADHESIVES, LLC (25 Forge Parkway Franklin, MA 02038) by qualified technical personnel. To Covalence's knowledge it is true and accurate. However, the information and recommendations are furnished for these products with the understanding that the purchaser or user, as the case may be, will independently determine that the product is suitable for the intended use, and that such use complies with all applicable federal, state, local laws and regulations. The data are submitted only for the user's information and consideration, and do not constitute a warranty of any kind (including but not limited to a warranty of merchantability or of fitness for a particular purpose), or a representation for which COVALENCE ADHESIVES assumes any legal responsibility.