



AFT-701


AFT-701

Aluminum Hip & Ridge Sealing & Flashing Tape

AFT-701 is designed for sealing hip and ridge areas on roof applications. It's also excellent for general flashing applications. AFT-701 has an aggressive grip, stays flexible during application, assuring immediate sealing on contact, and superior long-term adhesion. Providing leakproof results, this butyl adhesive/sealant is asphalt and solvent free and offers easy, fast application.

TECHNICAL DATA

Appearance	Mill finish aluminum foil
Bonding Time	Immediate Water Tight Aggressive Grip (Full bond within 24 hours)
Thickness	.30 mils
Backing	Aluminum Foil
Adhesive	THE GRAY MATTER™ Elastomeric Modified Butyl Rubber
Operating Temperature	-20°F to 200°F
Low Temperature Flexibility	Passes, no cracking
Tensile Strength	.445 psi avg.
Peel Strength	.17 lbs. per linear inch
Water Resistance	Excellent (Surface must be clean and dry before application)
U.V. Resistance	Excellent

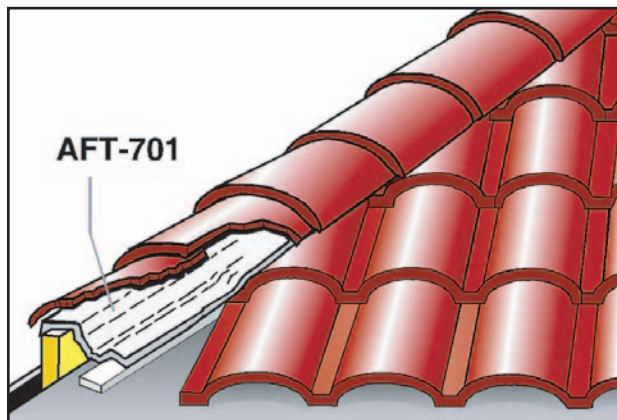

AFT-701 PART NUMBERS

1 Case w/ (8) 6" x 50' Rolls	.304081
1 Case w/ (6) 9" x 50' Rolls	.304082
1 Case w/ (6) 12" x 50' Rolls	.304077

APPLICATION

Preparation ... Clean surface - Remove dust, dirt, oil and moisture. Peel off few inches of release liner.

Method ... Apply exactly the first time, removal may damage tape and roof. Center tape on ridge board. First guide tape to lowest part of tile or shingle. **DO NOT STRETCH.** Press down firmly starting at lowest or most outside edge workin back toward center of tape, removing bubbles. Edges must have no openings, tunnels, or fishmouths.

Temperature35°F to 110°F

STORAGE

Temperature30°F to 110°F

Shelf Life24 Months

Flammability ... Non-flammable

(Contains no Asbestos, CFC or PCB)

PRECAUTIONS

Surfaces must be clean and free of moisture and contamination. Do not apply this product where temperatures will exceed 200°F. Do not stretch this product during application. Keep out of the reach of children. Review MSDS for safety information prior to use. **DO NOT** use where acidic or alkaline chemicals are present (ie., lab fume hood, vents, etc.)

For Industrial Professional Use Only.



Carlisle Coatings & Waterproofing Incorporated
900 Hensley Lane
Wylie, Texas 75098
Phone: (800) 527-7092 FAX: (972) 442-0076
www.hardcast.com