


## SUBMITTAL SHEET

- Made from G90 Galvanized Steel conforming to ASTM A525/527
- Standard: 3' length, 5' lengths available upon request
- Snap Lock, 30ga - 24ga
- Crimp, Bead x Raw
- Lined Snap Lock pipe available upon request


### TECHNICAL INFORMATION

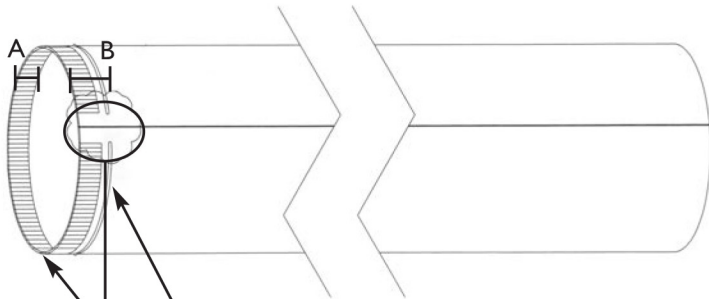

**Measurements**

- .375" width of bead
- A – 1 1/2" crimp length (+/- .0625")
- .25" length of tapered leading edge (+/- .0625")
- B – 1 3/4" length from top of bead to bottom of tapered leading edge

Reeves Lock



**Measurements**

- A – .23"
- B – .375"
- C – .4375"
- D – .20"

*From SMACNA HVAC  
 Duct Construction Standards  
 Metal and Flexible, 2nd Ed  
 (1995); 3.3 & 3.8*

**Product Availability**

Diameter	30 Ga	28 Ga	26 Ga	24 Ga
3"	x	x	x	
4"	x	x	x	x
5"	x	x	x	x
6"	x	x	x	x
7"	x	x	x	x
8"		x	x	x
9"			x	x
10"			x	x
12"			x	x
14"			x	x
16"			x	x
18"			x	x
20"			x	x
22"			x	x
24"			x	x

**SMACNA Gauge Requirements for Galvanized Steel**

Duct Diameter	2" w.g. max Positive Pressure	Duct Diameter	2" w.g. max Negative Pressure
3" - 8"	28 Ga	6" - 10"	28 Ga
9" - 14"	26 Ga	12"	26 Ga
15" - 26"	24 Ga	14" - 16"	24 Ga
		18" - 20"	22 Ga
		22" - 26"	20 Ga

**Job Name:** \_\_\_\_\_

**Location:** \_\_\_\_\_

**Mechanical Contractor:** \_\_\_\_\_

**Job No:** \_\_\_\_\_

**Manufacturer:** \_\_\_\_\_

**Date:** \_\_\_\_\_