


SUBMITTAL SHEET

- Round Sleeve is constructed of galvanized steel beaded both ends per SMACNA standards. Customer is to specify sleeve diameter.
- Length standard:
L=8" for diameters 6" - 12"
L=12" for diameters 14" and up.
- Blade is constructed of galvanized steel in 20 gauge minimum thickness
- 3/8" square zinc plated or heat rolled steelshaft held by U-clips to the blade with tight sealed bushings or bearings to the frame.
- This 15 position indexing regulator features a triggerless 3/4" twist locking nut that fixes the regulator in place once set.
- **OPTIONS:**
Insulated Sleeve (specify thickness)
Wrapped Sleeve (specify thickness)
1" Stand-off bracket w/ locking handle
1 1/2" Stand-off bracket w/ locking handle
2" Stand-off bracket w/ locking handle
3" Stand-off bracket w/ locking handle
- Special Gauge or length available on request.
- 1/2" round zinc plated pins, held by welded strap and adjustment setscrew to the blade with tight sealed bushings or bearings to the sleeve.
- 304 Stainless steel construction or other materials
- Special joint Connections: welded flange, crimped on one end (standard is raw)

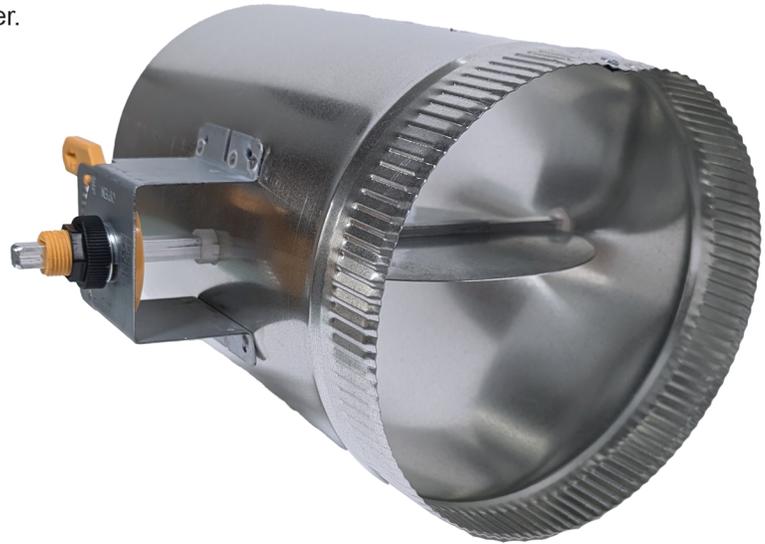

Job Name: _____

Location: _____

Mechanical Contractor: _____

Job No: _____

Manufacturer: _____

Date: _____

SUBMITTAL RECORD

JOB _____
 LOCATION _____
 SUBMITTED TO _____
 SUBMITTAL PREPARED BY _____
 APPROVED BY _____
 DATE _____





Submittal Form
Dyna-Click®
Regulator

DYNA-CLICK® REGULATOR

Dyna-Click is the latest in self-locking regulators offered by Duro Dyne. This 15 position indexing regulator features a triggerless 3/4" twist locking nut that fixes the regulator in place once set. Designed for use with square rod on both square and round externally insulated duct, it is offered in two standoff heights, 1-1/2" & 2". The Dyna-Click is engineered with a heavy duty spring so it stays set once clicked into place. The high visibility yellow handle allows it to be easily found in the field on wrapped duct.

- Two Sizes: 1-1/2" & 2"
- Self Locking
- 15 Position Settings
- Manual operation (no tools)
- 10° angled stand for use on both square and round duct

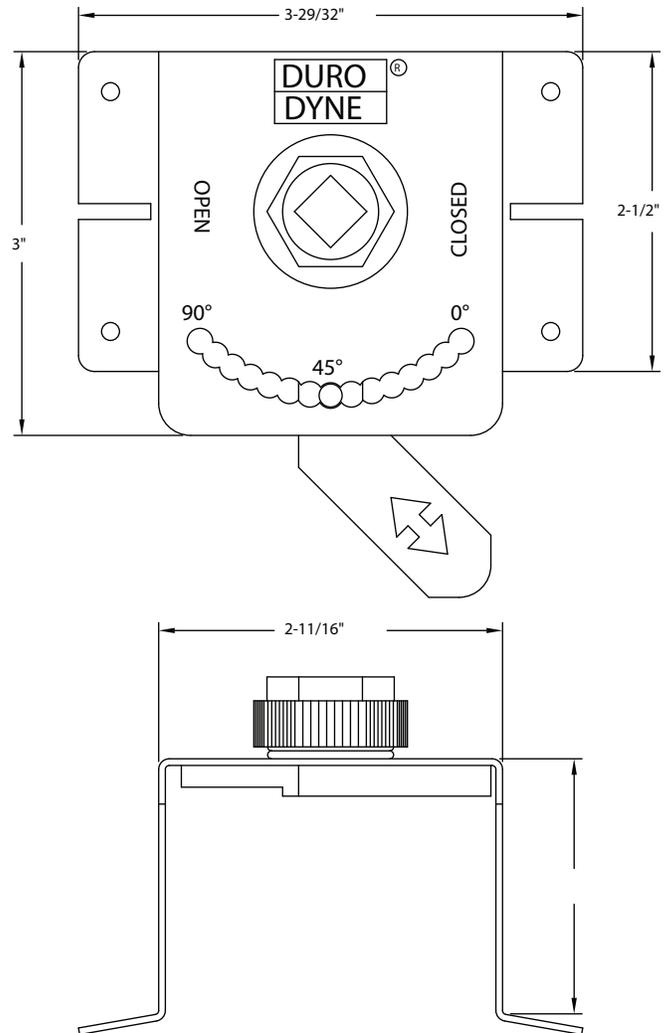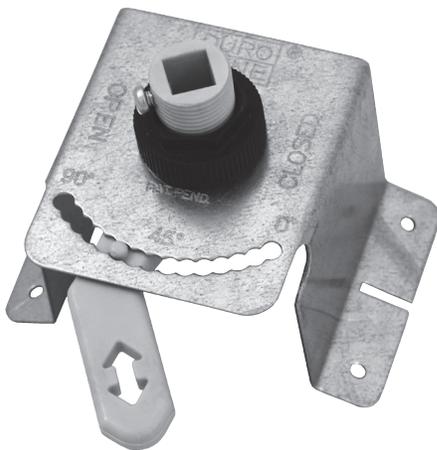

Ordering Information			
Item#	Code	Description	Quantity
6320	DC38150	3/8in Dyna-Click 1-1/2in Standard Regulator	10/Box
6321	DC38200	3/8in Dyna-Click 2in Standard Regulator	10/Box
7067	DC38150B	3/8in Dyna-Click 1-1/2in Standard Regulator Bulk	100/Box
7068	DC38200B	3/8in Dyna-Click 2in Standard Regulator Bulk	50/Box
6295	CDC38150	3/8in Cast Dyna-Click 1-1/2in Standard Regulator	10/Box
6296	CDC38200	3/8in Cast Dyna-Click 2in Standard Regulator	10/Box
6291	CDC38150B	3/8in Cast Dyna-Click 1-1/2in Standard Regulator Bulk	100/Box
6292	CDC38200B	3/8in Cast Dyna-Click 2in Standard Regulator Bulk	100/Box

Duro Dyne Corporate Headquarters, Bay Shore, NY
 631-249-9000 • Fax: 631-249-8346

Duro Dyne Midwest • Duro Dyne West • Duro Dyne Canada
 www.durodyne.com • E-mail: durodyne@durodyne.com



©2019 Duro Dyne Corporation
 Printed in USA 7/19
 BO008462